

## SUPERPLUS

### *Automatic*

- AUTOMATIC CUT & SEAL
- DEVICE TO ELIMINATE THE "FILM TAIL"
- "DON'T GET OFF" SYSTEM

#### TECHNICAL DATA

|                  |          |
|------------------|----------|
| Height           | 2466 mm  |
| Width            | 2000 mm  |
| Length           | 2804 mm  |
| Turntable Height | 86 mm    |
| Weight           | 500 kg   |
| Power Supply     | 240 Volt |
| Power Absorption | 2 kW     |

#### KEY POINTS

**European  
Chain Driven**

**This machine is the right solution for the most demanding of circumstances – The tough option!**


C-One Superplus is a fully automatic low profile turntable machine, with four solutions: an automatic film clamping system, automatic film cutting; film sealing system

Along with an infrared/radio remote control, these four systems allow the operator to be free from all manual work, increasing safety, improving packaging quality and saving time. Automatic, practical, robust, simple: C-One Superplus is the right solution even for the most demanding circumstances.



## SUPERPLUS

THE PERFECT WRAPPING

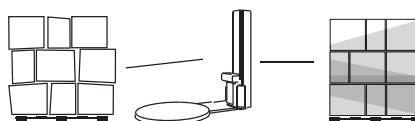


# SUPERPLUS

## Automatic

### PRODUCT SPECIFICATIONS – STANDARD

SEALING UNIT

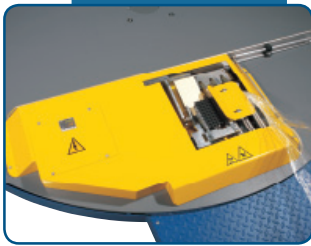

CONTROL PANEL



PPS CARRIAGE WITH ROPING SYSTEM



- Automatic cycle for film hooking, pallet wrapping, film cold cutting and film hot sealing
- Air device to blow up the film tail
- Power pre-stretch carriage
- Electronic printed circuit board
- Frequency controller for carriage speed adjustment
- Frequency controller for turntable speed adjustment
- Loading plate  $\varnothing$  2000 mm
- Maximum height of pallet: 2200 mm
- Maximum size of the pallet: 1200 mm x 1200 mm
- Maximum loading weight: 2000 kg
- Photocell for pallet height detection
- Safety stop at the base of the carriage
- Stop at 0 position
- Power board IP54
- 3 password levels (including lock password)
- Adjustable parameters by the control panel without password: cycle selection, bottom laps, top laps, topsheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension, starting wrapping height
- 3 working cycles: ascent/descent; topsheet; layers
- Storage of 32 end user programs
- 3 working ways: semimanual, semiautomatic, fixed height
- Strengthening operation
- Acoustic warning at the cycle beginning and stop
- Autodiagnostic
- Wrapped pallet counter
- Receiver for infrared/radio remote control
- Powder coating
- Braked turntable at the end of the cycle

### EXTRA OPTIONS

- Top-press
- Adjustable power pre-stretch
- 3000 mm max wrapping height
- 1800 mm turntable
- 2000 kg max pallet weight
- Remote control
- 2 years warranty - subject to service agreement
- Pit frame
- Photocell for black stretch wrap
- Weighing system
- Mechanical system to brake roll containers
- Feet under the machine
- Safety fences
- Ramp



Distributor