

VERTEX

Semi-Automatic

- TOUGHNESS
- ENDLESS SETTINGS
- SAFETY STOP

TECHNICAL DATA

Height	3305 mm
Width	3070 mm
Length	4060 mm
Weight	750 kg
Power Supply	240 Volt
Power Absorption	2 kW

Fully Automatic Options available :



VERTEX

KEY POINTS


**European
Chain Driven**

**The rotating arm
pallet wrapper
to work
24 hours per day
for many years**

Being automatic this machine provides great aptitude for continuous work at an automatic production line rate. Designed with a specifically built mechanism that allows to bear 'arm imbalance' at high rotation speeds, the machine is also equipped with an easy and fast installation system.

The C-One Vertex is also light with unstable pallets, strong with heavy pallets. It is the best solution for those who either; have to wrap many pallets, work with very unstable pallets or who have extremely heavy loads.

THE PERFECT WRAPPING

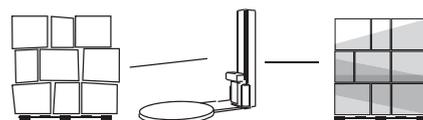

VERTEX

Semi-Automatic

PRODUCT SPECIFICATIONS – STANDARD

POWER PRE-STRETCH CARRIAGE



CONTROL PANEL



- Electronic printed circuit board
- Frequency controller for carriage speed adjustment
- Frequency controller for arm rotation speed adjustment
- Maximum height of pallet: 2400 mm
- Max size of the pallet: 1200x1200 mm
- Power pre-stretch carriage
- Photocell to detect the pallet height
- Safety stop loop at the base of the mast
- Stop at 0 position
- Power board IP54
- 3 password levels (including lock password)
- Adjustable parameters by the control panel without password: cycle selection, bottom laps, top laps, topsheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension, starting wrapping height
- 6 working cycles: ascent/descent; topsheet; only ascent; only descent; layers; stack
- Storage of 32 end user programs
- 3 working ways: semimanual, semiautomatic, fixed height
- Strengthening operation
- Acoustic warning at the cycle beginning and stop
- Autodiagnostic
- Wrapped pallet counter
- Receiver for infrared/radio remote control
- Powder coating
- Braked arm at the end of the cycle

EXTRA OPTIONS

- Adjustable power pre-stretch
- Power pre-stretch with auto cut-off system
- Roping system
- 3000 mm max wrapping height
- Remote control
- Photocell for black stretch wrap
- Mechanical system to brake roll containers
- Safety fences
- 2 years warranty
- subject to service agreement

CENTRAL CONICAL BEARING



Distributor