

BIFORIS

Semi-Automatic

- RAMP NOT NEEDED
- COMPLETE SET OF FEATURES AND OPTIONS
- "SAVE YOUR TIME" SYSTEM, WITH REMOTE CONTROL


TECHNICAL DATA

Height	2466 mm
Width	1650 mm
Length	2911 mm
Turntable Height	86 mm
Weight	550 kg
Power Supply	240 Volt
Power Absorption	1 kW

KEY POINTS

**European
2 Year Warranty
Chain Driven**

Thanks to the shape of the turntable, **C-One Biforis allows table loading without using an access ramp**

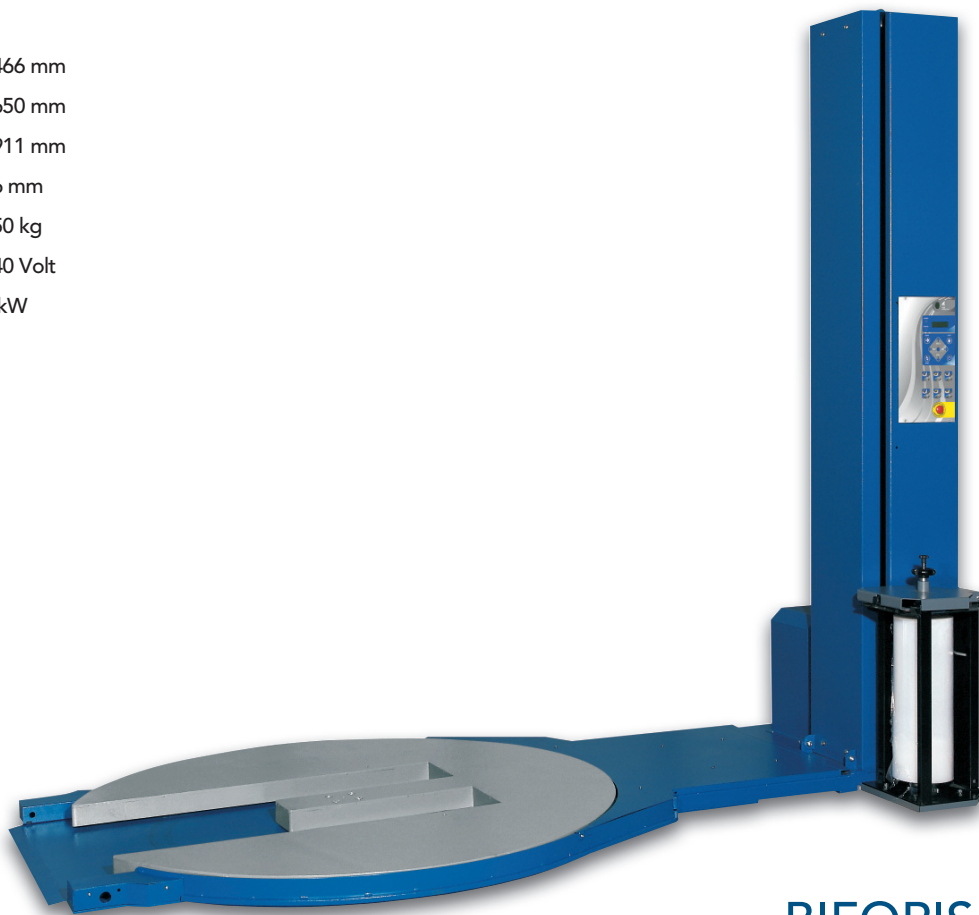


BIFORIS

Possible to access with hand pallet truck from the front or from one of the two sides, the C-One Biforis has many adaptable options to cater for your needs.

Ideal for those who have reduced space, unstable loads, or who use a hand pallet truck.

THE PERFECT WRAPPING

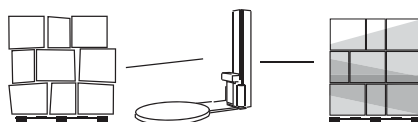

BIFORIS

Semi-Automatic

PRODUCT SPECIFICATIONS – STANDARD



- Fork-shaped turntable for hand pallet trucks
- Electronic printed circuit board
- Frequency controller for carriage speed adjustment
- Frequency controller for turntable speed adjustment
- Loading plate \varnothing 1650 mm
- Maximum height of pallet: 2200 mm
- Maximum size of the pallet: 1200 x 1200 mm
- Maximum loading weight: 1200 kg
- Electromagnetic brake for the stretching of the film
- Photocell for pallet height detection
- Safety stop at the base of the carriage
- Stop at 0 position
- Power board IP54
- 3 password levels (including lock password)
- Adjustable parameters by the control panel without password: cycle selection, bottom laps, top laps, top
- Sheet cycle parameters, rotation speed, carriage ascent speed, carriage descent speed, film tension, starting wrapping height
- 6 working cycles: ascent/descent; topsheet; only ascent; only descent; layers; stack
- Storage of 32 end user programs
- 3 working ways: semimanual, semiautomatic, fixed height
- Strengthening operation
- Acoustic warning at the cycle start and stop
- Autodiagnostic
- Wrapped pallet counter
- Receiver for infrared/radio remote control
- Powder coating
- Braked turntable at the end of the cycle
- Power Pre Stretch
- 2 years warranty - subject to service agreement

EXTRA OPTIONS

- Top-press
- 3000 mm max wrapping height
- Adjustable power pre-stretch
- Roping system
- Remote control
- Photocell for black stretch wrap
- Clip to tie the film to the turntable
- Safety fences



Distributor